

80x80x25 mm

53.0~60.0 CFM




■ 产品规格


	轴承	电压	电流	功率	转速	风量	风压	噪音	重量	曲线
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(Inch-H ₂ O)	(dB(A))	(g)	
PF80251V1-000C-A99	●	12	341	4.10	4800	60.0	0.41	46.5	91.0	1
PF80251V2-000C-A99	●	12	285	3.40	4500	57.0	0.35	45.0	91.0	2
PF80251V3-000C-A99	●	12	223	2.70	4200	53.0	0.30	43.5	91.0	3
PE80252V1-000C-A99	●	24	200	4.80	4800	60.0	0.41	46.5	91.0	1
PE80252V2-000C-A99	●	24	166	3.99	4500	57.0	0.35	45.0	91.0	2
PE80252V3-000C-A99	●	24	137	3.29	4200	53.0	0.30	43.5	91.0	3
PE80254V1-000C-A99	●	48	114	5.48	4800	60.0	0.41	46.5	91.0	1
PE80254V2-000C-A99	●	48	100	4.80	4500	57.0	0.35	45.0	91.0	2
PE80254V3-000C-A99	●	48	92	4.42	4200	53.0	0.30	43.5	91.0	3

型号	轴承	电压	电流	功率	转速	风量	风压	噪音	重量	曲线
	⊕ 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(Inch-H ₂ O)	(dB(A))	(g)	
PF80251B1-000C-A99	⊕	12	341	4.10	4800	60.0	0.41	47.5	91.0	1
PF80251B2-000C-A99	⊕	12	285	3.40	4500	57.0	0.35	46.0	91.0	2
PF80251B3-000C-A99	⊕	12	223	2.70	4200	53.0	0.30	44.5	91.0	3
PE80252B1-000C-A99	⊕	24	200	4.80	4800	60.0	0.41	47.5	91.0	1
PE80252B2-000C-A99	⊕	24	166	3.99	4500	57.0	0.35	46.0	91.0	2
PE80252B3-000C-A99	⊕	24	137	3.29	4200	53.0	0.30	44.5	91.0	3
PE80254B1-000C-A99	⊕	48	114	5.48	4800	60.0	0.41	47.5	91.0	1
PE80254B2-000C-A99	⊕	48	100	4.80	4500	57.0	0.35	46.0	91.0	2
PE80254B3-000C-A99	⊕	48	92	4.42	4200	53.0	0.30	44.5	91.0	3

■ 风量 / 风压特性曲线

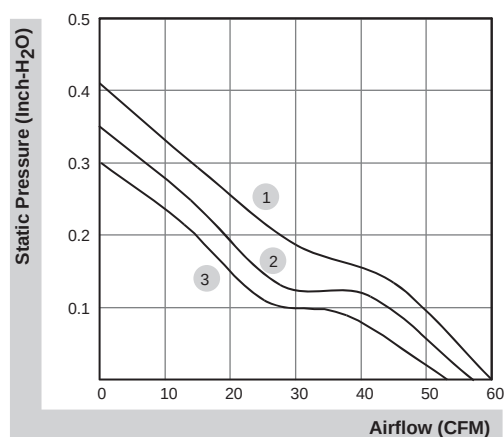

■ 产品外观尺寸(mm)

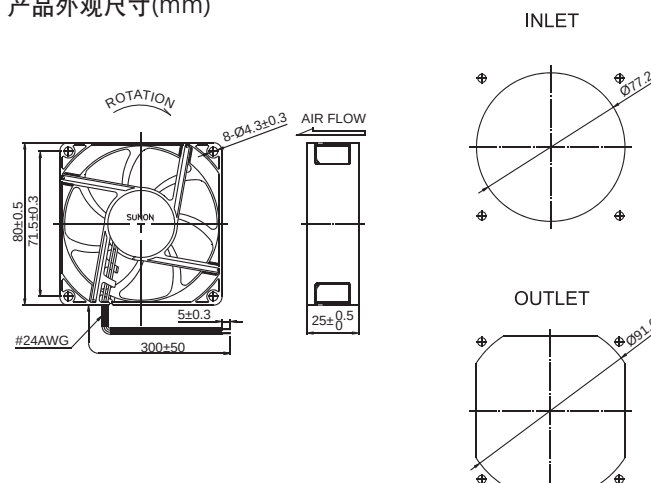

*以上产品如有客制化设计需求请与SUNON销售人员联络。

*以上规格如有变更恕不另行通知。最新产品信息请以SUNON网站(www.sunon.com)公告为主。